

Powered Splice Connection Kits

CSA:

Class I, Division 2, Groups B, C, D
Class II, Groups E, F, G (Canada Only)
Class III (Canada Only)
Enclosure Type 4X, Temperature Code T6 – T3
Class 1 Zone 1; Ex e II; T6 – T3 ①

FM:

Class I, Division 2, Groups B, C, D
Class II, Groups E, F, G; Class III
Enclosure Type 4X, IP66, Temperature Code T ①
Class 1 Zone 1; AEx e IIC T
-40°C ≤ Tamb ≤ 55°C

ATEX:

① II 2 G Ex e IIC T5 Gb
② II 2 D Ex tb IIIC T95° C
-40° C ≤ Tamb ≤ +55° C

Applications

- The Powered Splice Connection Kit is designed to connect up to three heater cables to customer supplied power wiring
- The AXPTC-125 is designed per NEC/CEC requirements and provides entries compatible with ¾" NPT conduit entry
 - Standard terminal blocks are sized for maximum 8 AWG power supply wiring
- The EXPTC-125 is designed per IEC requirements and it provides entries compatible with M25 threaded glands and fittings
 - Standard terminal blocks are sized for maximum 6mm² power supply wiring
- Kits are used to connect and terminate Nelson self-regulating heater cable series LT-J, LT-JT, HLT-J, XLT-J and CLT-JT ②

Features


- The enclosure must be rated to meet the specifics of the installed environment
- Global-reach industrial-grade universal connection kits for Hazardous Locations
- Certified for NEC/CEC (AX Series) and IEC (EX Series) installations
- Incorporate rugged, non-metallic construction rated for IP66 / NEMA 4X
- Designed with corrosion resistant, antistatic enclosures and components
- Fit all wattages of Nelson LT-J, LT-JT, HLT-J, XLT-J and CLT-JT series self-regulating heater cables
- Min Installation Temp: -40°C (-40°F)
- Temp Use Range: -50°C to +55°C (-58°F to 131°F) ambient
- Conductor Size: 1 mm² (18 AWG) to 6 mm² (8 AWG)
- Voltage Range: 300 Vac Maximum
- Ingress Protection: NEMA 4X, IP66
- Max Amperage: 14 A CLT Series, 18 A LT, HLT Series, 25 A XLT Series
- Enclosure Material: Glass reinforced, carbon-loaded, polyester, UV resistant, polymer
- Weight: 2 Kg (4.4 lbs)

Accessories


- Pipe clamp to secure standoff to pipe (one is included in each kit):
 - PC03 – 80 mm (3 in) and smaller pipe
 - PC12 – 80 mm (3 in) to 12 inch (300 mm) pipe
 - PC20 – 300 mm (12 in) to 20 inch (500 mm) pipe
- Small pipe adaptor: HC-SPA – 25 mm (1.0 in) and smaller pipe

Ordering Information

- One kit should be ordered for each type of connection needed
- A pipe clamp of the appropriate size for the pipe must be selected (-3 for PC03, -12 for PC12, -20 for PC20) for each connection kit
- A small pipe adaptor kit must be ordered for each kit for installation on 25mm (1") or smaller pipe

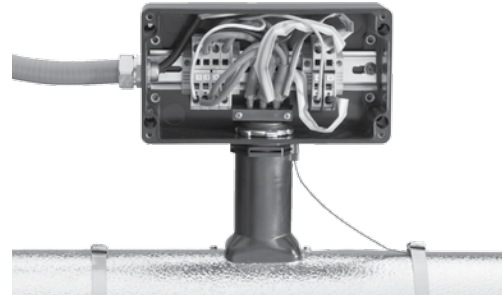

Dimensions in Millimeters (Inches)

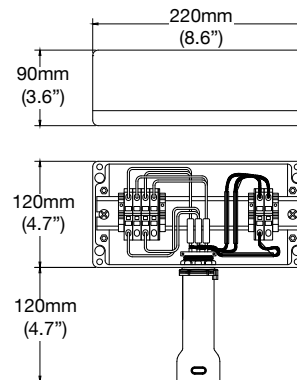

Powered Splice Connection Kits

CSA:
 Class I, Division 2, Groups B, C, D
 Class II, Groups E, F, G (Canada Only)
 Class III (Canada Only)
 Enclosure Type 4X, Temperature Code T6 – T3
 Class 1 Zone 1; Ex e II; T6 – T3 ①

FM:
 Class I, Division 2, Groups B, C, D
 Class II, Groups E, F, G; Class III
 Enclosure Type 4X, IP66, Temperature Code T ①
 Class 1 Zone 1; AEx e IIC T
 -40°C ≤ Tamb ≤ 55°C

ATEX:
 Ⓜ II 2 G Ex e IIC T5 Gb
 Ⓜ II 2 D Ex tb IIIC T95° C
 -40° C ≤ Tamb ≤ +55° C

Selection Table

Kit Contents	AXPTC125	EXPTC125
Junction Box, Lid, and Terminal Block	with ¾" NPT entry	with M25 threaded entry
Standoff	1	1
6" Guide Tubes	6	6
Enclosure Adapter	1	1
Silicone End Termination Fitting	2	2
Silicone Power Termination Fitting	3	3
Silicone Adhesive	1	1
Cable Clamp	1	1
Locknut	1	1
Cable Grommets	1	1
Green Wire Tubing	3	3
Cable Tie	1	1